




BPP

AXIAL BATHROOM FANS / Wall Mounted

The front panel is larger and tighter. This feature provides a robust mounting design. It is silent and corrosion resistant. Long life of the motor against environmental factors. It has two-way operation. Meets the need for fresh air for indoor places;

in the other direction, exudes dirty air in the interior. Electrical control structure does not require external control or panel. Used in offices such as offices, meeting rooms, schools, smoking rooms.

Technical Drawing and Tables

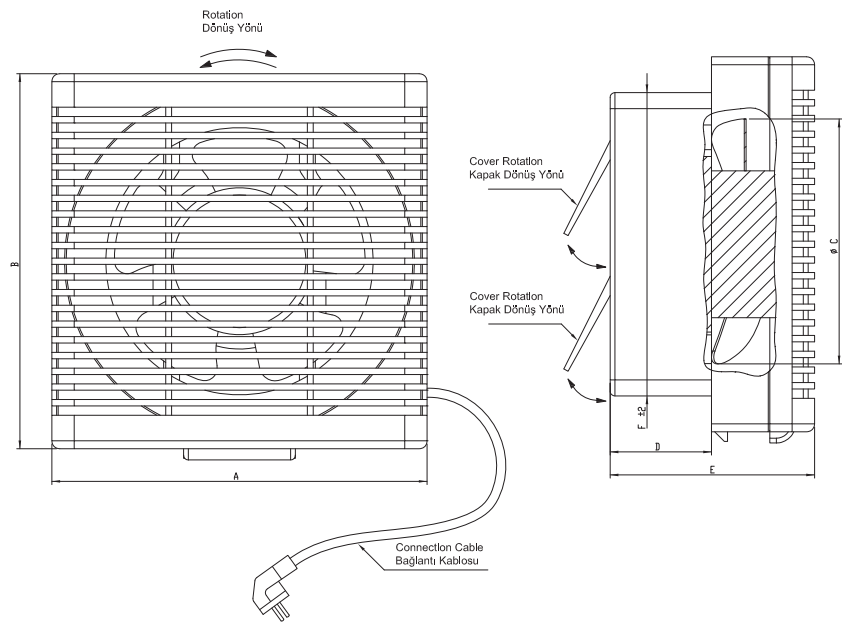


TYPE	A	B	C	D	E	F
BPP 15	235	235	160	65	130	190
BPP 20	290	290	200	65	140	240
BPP 25	340	340	250	70	145	290
BPP 30	395	395	300	80	155	335


Dimensions are in (mm)

TYPE	VOLTAGE	FREQUENCY	POWER	CURRENT	CAPACITOR	SPEED	AIR FLOW	SOUND PRESSURE	INSULATION CLASS	PROTECTION CLASS	WEIGHT	PIECES IN BOX
	V	Hz	W	(A)	(μ F)	r.p.m	m ³ /h	dB(A)	Ins.cl.	IP	kg	AD
BPP 15	230	50/60	25	0,10	-	1350/1620	300/360	40	B	20	1,8	5
BPP 20	230	50/60	30	0,12	-	1250/1450	500/580	41	B	20	2,6	5
BPP 25	230	50/60	35	0,15	-	1250/1375	735/810	43	B	20	2,8	5
BPP 30	230	50/60	40	0,19	-	1100	1100	44	B	20	3,2	5


Sound Level Measured from 3m distance in room condition.

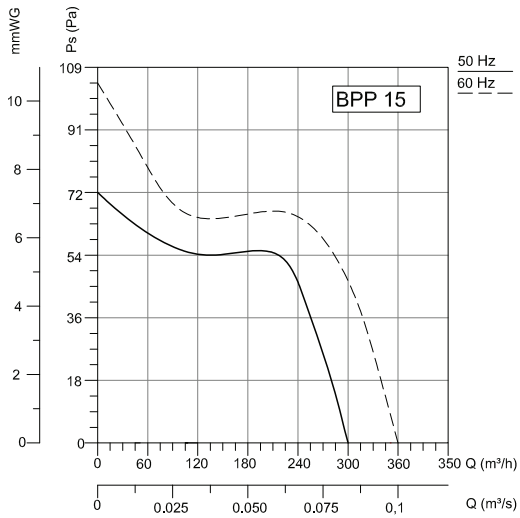


Frequency	Tot	63	125	250	500	1000	2000	4000	8000	Hz
L _{WA} Surrounding	47	24	43	36	41	36	34	31	29	dB(A)

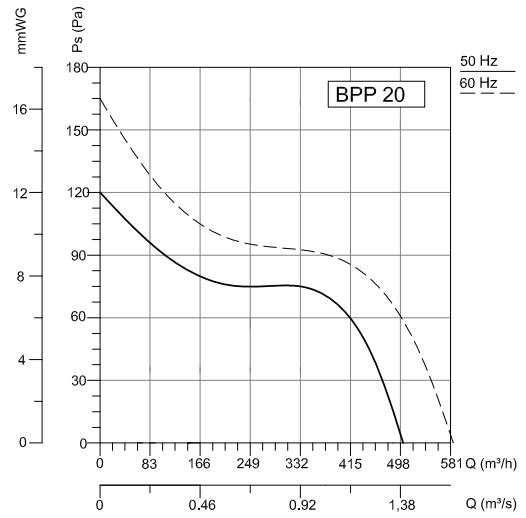

Frequency	Tot	63	125	250	500	1000	2000	4000	8000	Hz
L _{WA} Surrounding	48	25	44	37	42	37	35	32	30	dB(A)

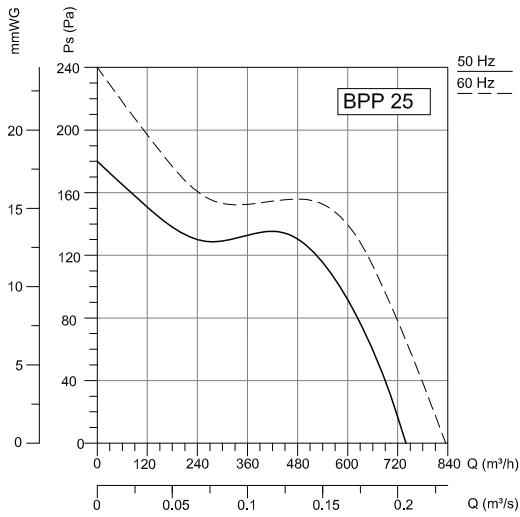

Frequency	Tot	63	125	250	500	1000	2000	4000	8000	Hz
L _{WA} Surrounding	50	25	39	41	47	41	39	34	39	dB(A)

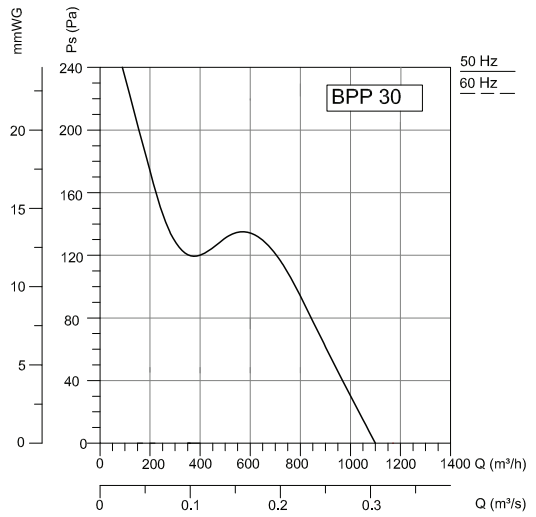

Frequency	Tot	63	125	250	500	1000	2000	4000	8000	Hz
L _{WA} Surrounding	51	23	35	39	49	43	41	35	28	dB(A)

Accessories



BSC